



INSTALLATION INSTRUCTIONS
POLARIS RZR PRO XP
TINTED DOOR INSERTS
PART # 55-4600

IMPORTANT NOTICES

READ AND UNDERSTAND THESE INSTRUCTIONS COMPLETELY BEFORE INSTALLATION TO AVOID INJURY TO YOURSELF, DAMAGE TO THE VEHICLE OR ACCESSORY.

- For proper installation, **TWO** people are required.
- Torque specifications must be followed when tightening bolts. Over-tightening any and/or all screws will cause cracks around mounting holes which is not covered by any warranty.
 - As specified on carton label, once protective film on shields is removed, product cannot be returned.
- As specified on carton label, damage caused by packaging staples is not covered by warranty. All staples must be removed prior to removing product from carton.
- Failure to follow these installation instructions completely may void any warrantable components and result in product damage or personal injury.
- Do not use Loctite or any other similar fastener adhesive. These types of products react to plastics and cause cracking. Not covered by any warranty.
- The application of improper cleaners, abrasive and/or dirty cleaning towels can severely damage the product. Failure to follow cleaning recommendation (provided herewith) may void any warrantable components.

DEALER


These instructions contain important information for future reference and must be given to the customer at time of purchase or upon completion of installation.

Parts List (parts available with kit only and not available separately)

ITEM	PART NAME	DESCRIPTION	QTY
A	Driver side center door insert	CNC cut-out made of 1/4" thick GE tinted polycarbonate or equivalent	1
B	Passenger side center door insert	CNC cut-out made of 1/4" thick GE tinted polycarbonate or equivalent	1
C	Driver side lower door insert	CNC cut-out made of 1/4" thick GE tinted polycarbonate or equivalent	1
D	Passenger side lower door insert	CNC cut-out made of 1/4" thick GE tinted polycarbonate or equivalent	1
INSTRUCTION BAG	E	Mounting hardware	Includes: 14 push type retainers 3/16"

1. Passenger side center door insert (Item B) installation:


- a) Temporarily remove the OEM door cover from the door panel by removing the OEM screws (13x) and OEM aluminum bracket as shown by the arrows below. Those components will be reinstalled later.

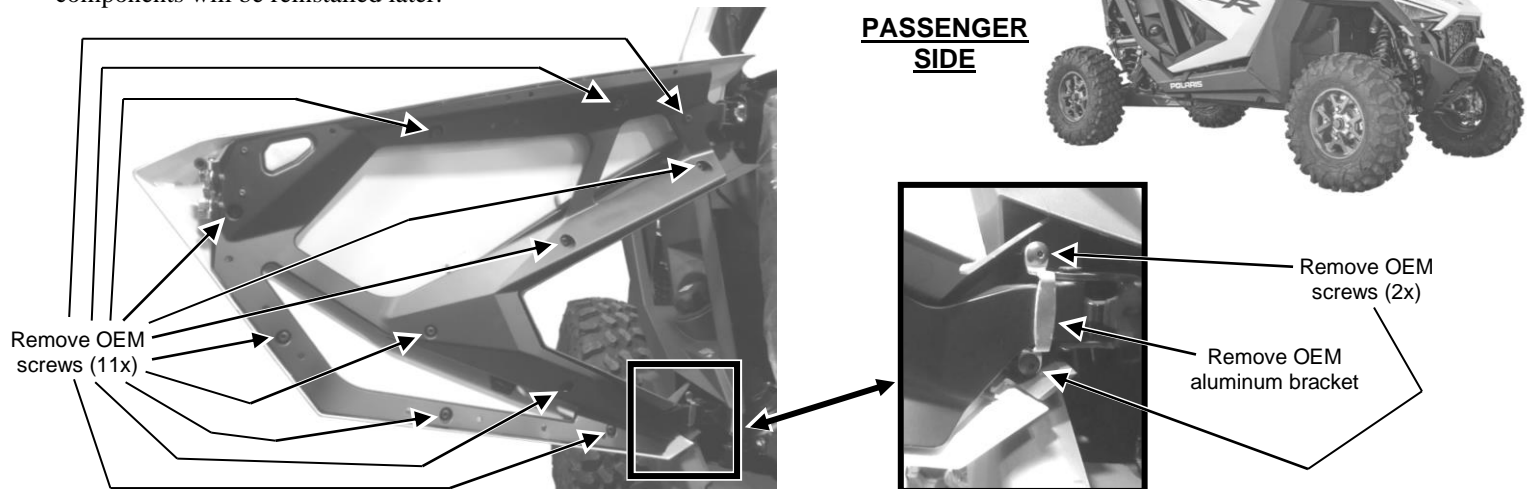

IMPORTANT NOTICES

For following steps b), we strongly recommend the assistance of a second person to hold all the door panel components in place while securing them all back to the door frame.



- b) Position the passenger center door insert (Item B) on the OEM door panel removed in previous step as shown below. Ensure that all 3 rectangular slots of the center door insert are properly aligned with the mounting tabs of the OEM door panel and reinstall all parts to the OEM door frame using OEM screws and OEM brackets removed in step a). There is no other hardware needed to install the center door insert.

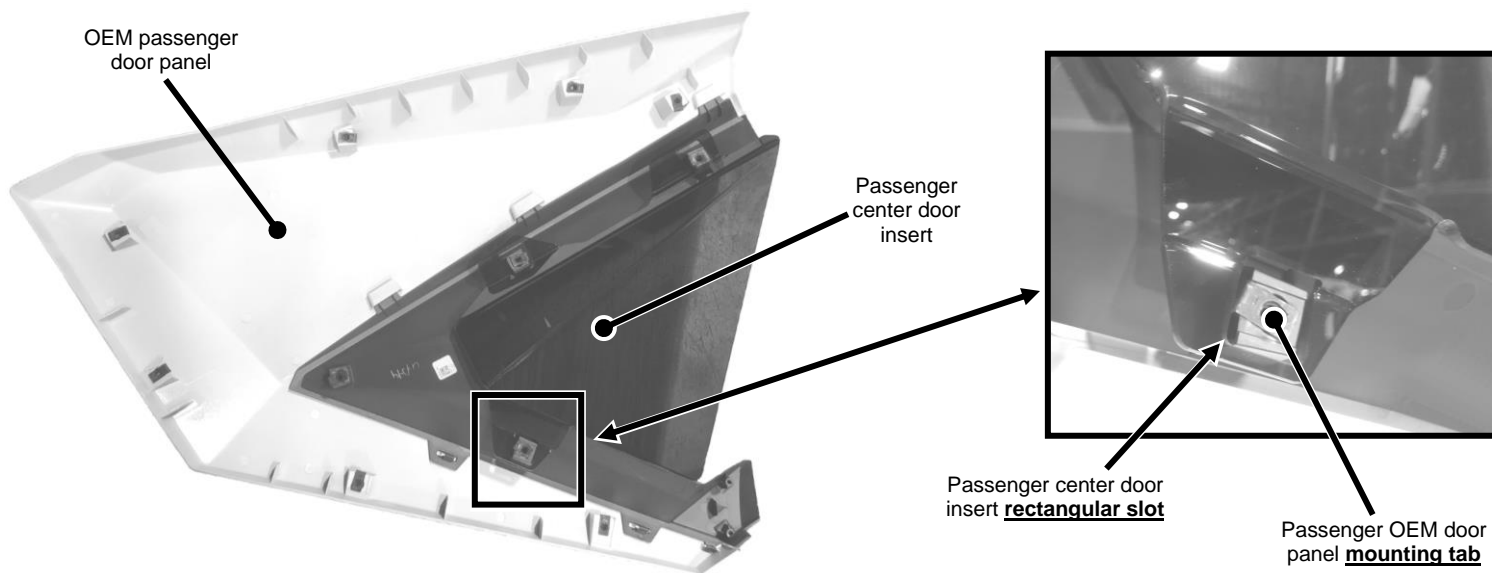

- c) Repeat steps a) and b) for driver center door insert (Item A) installation.

2. Passenger side lower door insert (Item D) installation:

- d) Align the mounting holes of the passenger lower door insert (Item D) to the empty holes of the OEM door frame and secure in place with supplied push type retainers (Item E) as shown below.

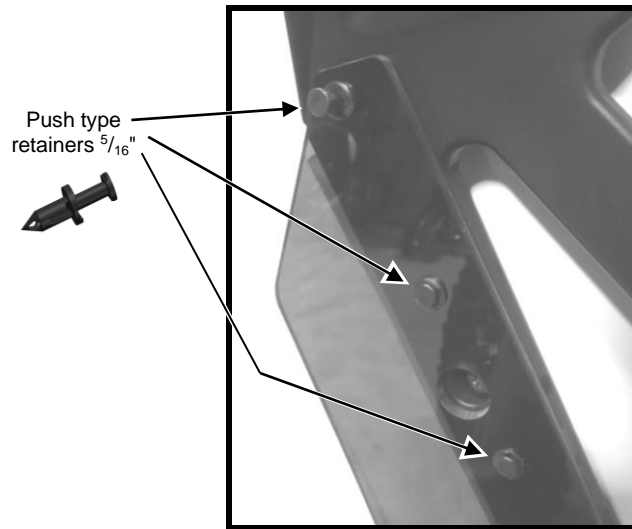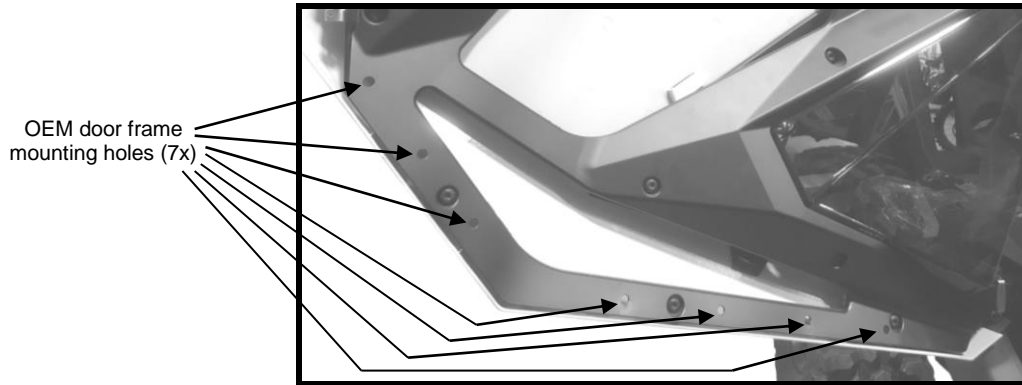

- e) Repeat steps d) for driver lower door insert (Item C) installation.

2. Maintenance and Care

Tighten all hardware after first use and periodically thereafter.

CLEANING:

- Rinse with lukewarm water; wash gently with mild soap or detergent and lukewarm water, using a soft cloth or sponge. **DO NOT SCRUB** or use brushes or squeegees.
 - Rinse again. Dry with soft cloth or moist cellulose sponge to prevent water spotting.
- To remove wet paint, glazing compound or grease, rub lightly with a good grade of VM&P naphtha or isopropyl alcohol, then wash and rinse. **DO NOT USE GASOLINE.**

NOTICE: Abusive cleaning procedures by hand washing or automated washing equipment will eventually result in visual hazing, loss of light transmission and coating delamination.

Compatible Cleaning Agents

- Aqueous Solution of Soaps and Detergents

Joy | Freon T.F. | Palmolive liquid | Top Job | VM&P grade Naphtha | Windex (with ammonia D)

MINIMIZING HAIRLINE SCRATCHES

For minimizing scratches and minor abrasions, mild automobile polish can be used.

Recommended products: Johnson Paste Wax, Novus Plastic Polish #1 and #2, Mirror Glaze plastic polish and Plexux1.

Testing polish on a separate Lexan sample is recommended. Be sure to follow product instructions carefully.